

# HMF EXPRESS

FRAMES

Phone: 866-452-1845

Fax: 910-452-1848

**Thank You !!!**



Lead Time:  Turbo  1 Day  2 Days  3 Days  5 Days  7 Days  8-10 Days

PO# \_\_\_\_\_  Order  Quote

SO# \_\_\_\_\_ Customer: \_\_\_\_\_ Contact: \_\_\_\_\_ Date: \_\_\_\_\_ Page: \_\_\_\_\_ of \_\_\_\_\_

Line	Quantity	Handing	Material	Frame Type	Opening Width	Opening Height	Jamb Depth	Throat	Profile	Head Face	Jamb Face	Rabbets	Fire Label (Min.)	Anchors	Locations	Hinges	Strike	Closer (RA or PA)	Construction	Glazing Bead	Loose/Installed	See Notes	Mark #	Price
1																								
2																								
3																								
4																								
5																								
6																								
7																								
8																								

Material Legend	Frame Type Legend	Anchor Legend	Locations Legend	Strike Legend	Packaging
6C -16 Ga CRS 6A -16 Ga A60 4C -14 Ga CRS 4A -14 Ga A60 2C -12 Ga CRS 2A -12 Ga A60	S - Single P - Pair C - Cased Open M - Communicating D - Double Egress E - Elevation (Dwg.) BL - Borrowed Lite SL - Sidelite TF - Transom Lite TS - Transom & SL	CO - Compression Anchors EM - Existing Masonry Anchors MP - Multi-purpose Anchors SI - Snap-In Steel Stud Anchors SS - Steel Stud Anchors TA - T-Anchors WA - Wire Anchors WS - Wood Stud Anchors NO - No Anchors NT - Provide Anch:	AM - Amweld CE - Ceco CU - Curries FE - Fenestra HM - HMF Express ME - Mesker PI - Pioneer RE - Republic ST - Steelcraft * - See Chart	A - ASA B - Blank C - Conc. Vertical Rod D - Deadlock F - Flush Bolt R - Rim panic S - Surface Vertical Rod T - T Strike AD - ASA X Deadlock TD - T Strike X Deadlock	Type: _____ <b>Total:</b> _____ <b>Hinge Legend</b> A - 4.5 S.W.    D - 5 H.W. B - 4.5 H.W.    N - None C - 5 S.W.        E - Enter Below <b>Construction Legend</b> KD - Knock Down FW - Face Welded CW - Cont. Welded

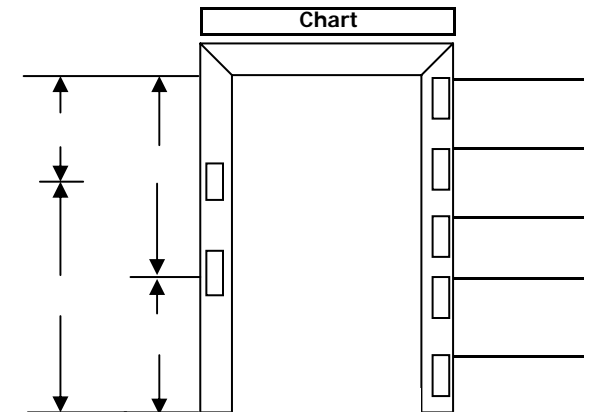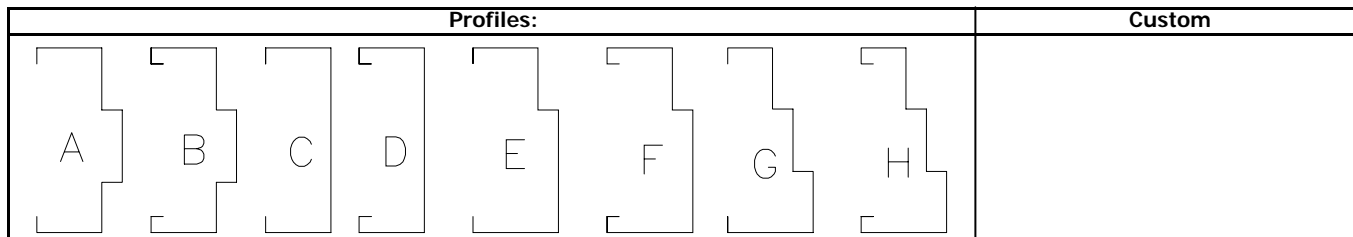

Notes	Line #

QUOTES ARE VALID NO MORE THAN 60 DAYS FROM DATE OF ISSUE