

Lead Time: Turbo 1 Day 2 Days 3 Days 5 Days 7 Days 8-10 Days

Fax: 910-452-1848

PO# _____


Order Quote

SO# _____ Customer: _____ Contact: _____ Date: _____ Page: _____ of _____

| Line | Quantity | Handing | Material | Opening Width | Opening Height | Net Width | Net Height | Undercut | Thickness | Fire Label (Min.) | Door Style | Core | Edge | Bevel (Y/N) | Locations | Hinges | Lock/Strike | Astragal | Closer Reinf. (Y/N) | See Notes | Mark # | Price | |
|------|----------|---------|----------|---------------|----------------|-----------|------------|----------|-----------|-------------------|------------|------|------|-------------|-----------|--------|-------------|----------|---------------------|-----------|--------|-------|--|
| 1 | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | | | | | | | | | | | | | | | | | | | | | | | |
| 6 | | | | | | | | | | | | | | | | | | | | | | | |
| 7 | | | | | | | | | | | | | | | | | | | | | | | |
| 8 | | | | | | | | | | | | | | | | | | | | | | | |

| Locations Legend | Astragals | Lock/Strike Legend | Hinge Legend | Material Legend | Packaging: |
|---|--|---|--|--|---|
| AM - Amweld CE - Ceco CU - Curries FE - Fenestra HM - HMF Express ME - Mesker PI - Pioneer RE - Republic ST - Steelcraft * - See Chart | FL - Flat Loose FI - Flat Inst. ZL - Z Loose ZI - Z Inst. N - None | 1 - 161 2 - 161 x 161 DL 3 - 160 4 - 86 Edge 5 - Mortise * 6 - 1 1/2" DL O - Other (Enter in Notes Column) *Enter Manufacturer & Model in Notes column | A - ASA B - Surf. Bolts C - Conc. Vert. Rod D - DL Strike F - Flushbolt M - Mort. Panic P - Push/Pull R - Rim Panic S - Surf. Vert. Rod * - See Notes | Gauge 8 - 18 Ga 6 - 16 Ga 4 - 14 Ga 2 - 12 Ga Material A - A60 C - CRS G - G90 S - SS *NOTE* Combine Gauge & Material. (Ex: 8C - 18 Ga CRS) | Type: Total: Freight Estimate Core Legend S - Steel Stiff. P - Polystyrene T - Temp Rise* * List Degree in Notes |
| | | | Edge Legend N - Not Seamless B - Bondo Seamless W - Welded Seamless* | Thickness Legend 4 - 1 3/4" 8 - 1 3/8" | |

| Door Styles Legend | | | | | | | | | | | |
|--------------------|------|----|----|----|----|----|----|----|----|----|----|
| | | | | | | | | | | | |
| F | VL | NL | HG | FG | LV | DU | 2E | 2T | 4T | 4E | 6E |
| Notes | Line | | | | | | | | | | |
| | # | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |

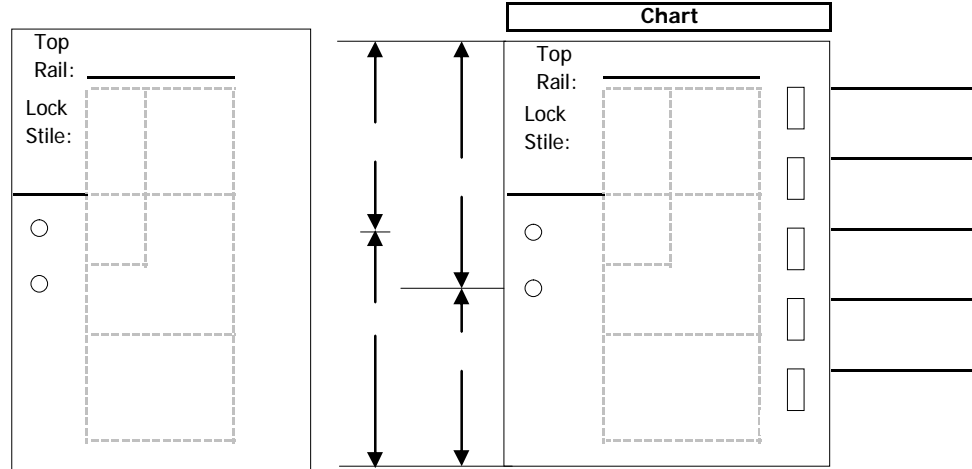

QUOTES ARE VALID NO MORE THAN 60 DAYS FROM DATE OF ISSUE