

No Return Profile 3-Sided Frames (Double Rabbet)

FRAME PART	UL RATED	NON RATED
THROAT		
MINIMUM	4 5/8"	3 9/16"
MAXIMUM	7 3/4"	No limit
A=SOFFIT		
MINIMUM	1"	5/8"
MAXIMUM	4 3/8"	No limit
B1=HW Rabbet		
MINIMUM	1 15/16"	5/8"
MAXIMUM	1 15/16"	No limit
B2=Non HW Rabbet		
MINIMUM	1 9/16"	5/8"
MAXIMUM	1 9/16"	Varies
D=FACES		
MINIMUM	2"	5/8"
MAXIMUM	4"	No limit
HEIGHT		
MINIMUM	20"	20"
MAXIMUM	96" Single 84" Pair	No limit
WIDTH - SGL.		
MINIMUM	24"	No limit
MAXIMUM	48"	No limit
WIDTH PAIR		
MINIMUM	48"	No limit
MAXIMUM	72"	No limit



Holes in faces for screw / nail attachment

**** Maximum Fire Rating = 90 Minute ****

*** A = 1 1/4" min. for Compression Anchors**

Rough Opening (Comp. Anc.) = Door Opening + 2" Width, + 3/4" Height

Rough Opening (No Anc) = Door Opening + 1 1/2" Width, + 3/4" Height

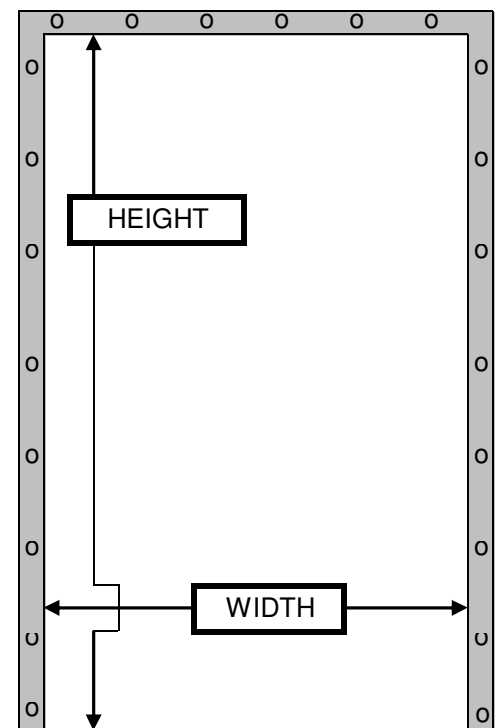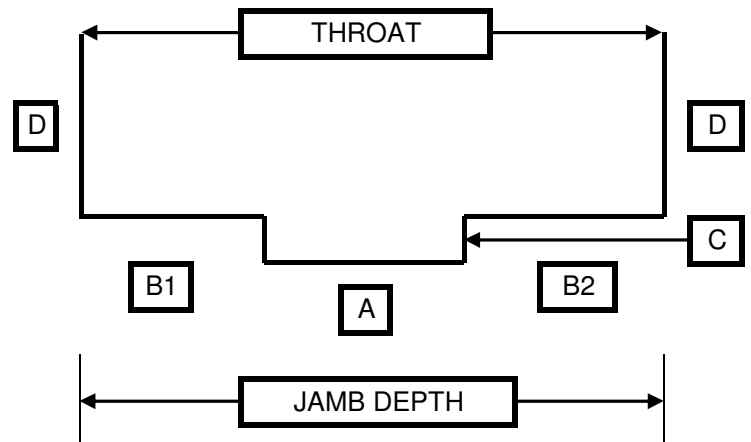

ANCHOR OPTIONS

Warnock Hersey - None (Face holes only)

Non UL - None, CO, SS, WS