



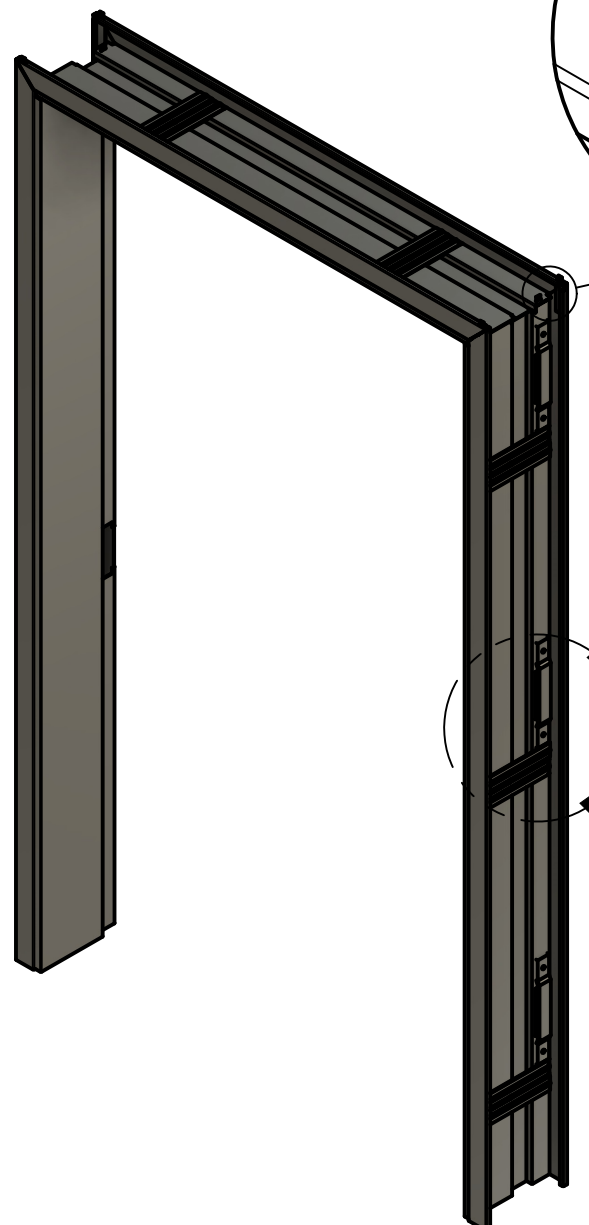


DETAIL A

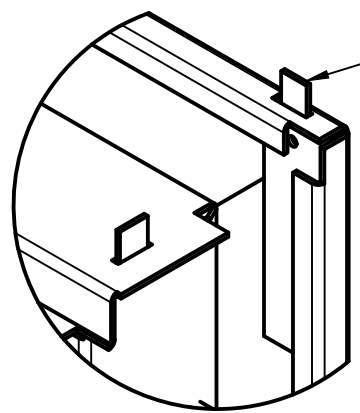

Modified Knockdown tabs to be welded in jambs to assemble with slots located in head.


Minimum Jamb Depth: 9"
Maximum Jamb Depth: 13 5/8"

DETAIL B

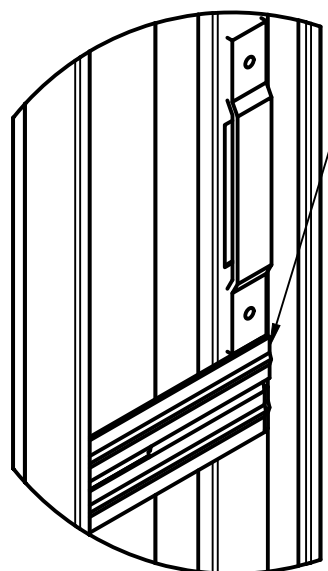


Adjustable Brackets to be placed below hinge pads in hinge jamb, equally spaced in strike jamb and head avoiding interference with preps/reinforcements.

Hardware Tape Profile

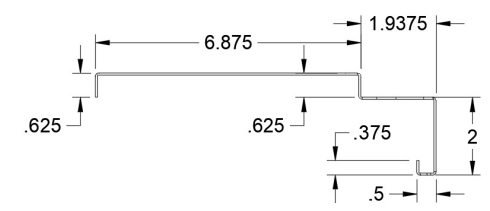

Non Hardware Tape Profile

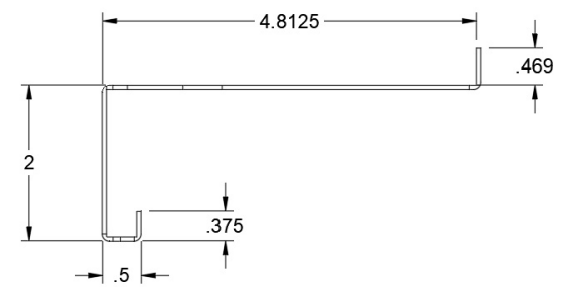

Additional Parts Required		
Adjustable Brackets	2 In Head	If Width < 48"
	4 In Head	If Width => 48"
	3 In Jamb	If Height < 96"
	4 In Jamb	If Height => 96"
Knockdown Tabs	4	

HMFEXPRESS

PROJECT			
Adjustable Frame			
TITLE			
Assembly			
Large Jamb Depth Option			
9"-13 5/8"			
APPROVED	SIZE	CODE	DWG NO
CHECKED	B	N/A	1
DRAWN	Brian Padgett	10/24/2024	SCALE NOT TO SCALE
		WEIGHT N/A	SHEET 1/1