


DETAIL A

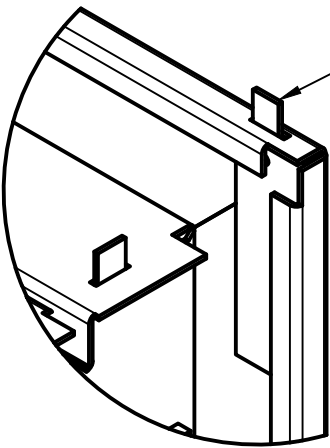


Modified Knockdown tabs
to be welded in jambs to
assemble with slots located
head.

A

Minimum Jamb Depth: 5 ⁵/₈"
Maximum Jamb Depth: 8 ¹⁵/₁₆"


DETAIL B

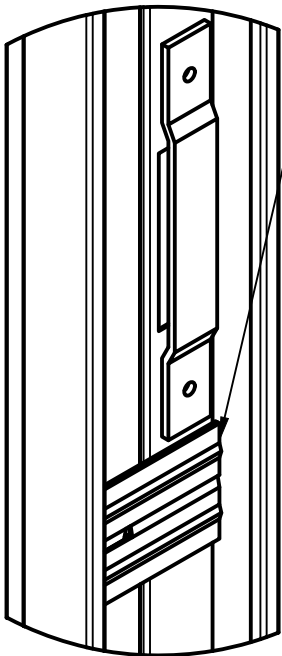


Adjustable Brackets to be
placed below hinge pads
in hinge jamb, equally spaced
in strike jamb and head
avoiding interference with
preps/reinforcements

B

Hardware Tape Profile

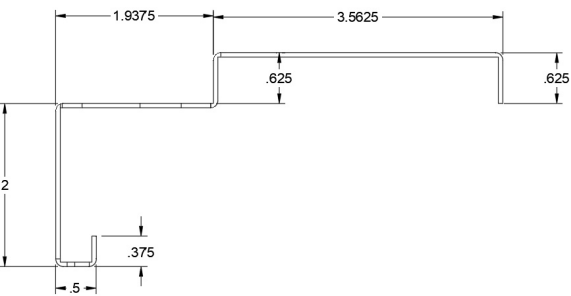

Non Hardware Tape
Profile

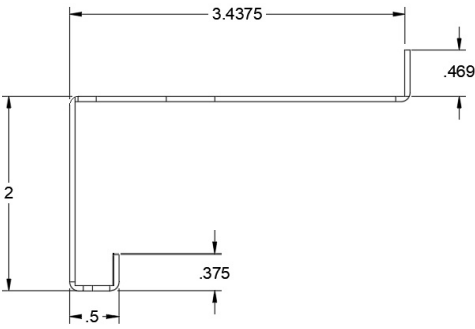

Additional Parts Required

Adjustable Brackets	2 In Head	If Width < 48"
	4 in Head	If Width > 48"
	3 in Jamb	If Height < 96"
	4 in Jamb	If Height > 96"
Knockdown Tabs	4	

HMF*EXPRESS*

PROJECT				
Adjustable Frame				
TITLE				
Assembly				
Small Jamb Depth Option				
5 5/8"- 8 15/16"				
APPROVED	SIZE	CODE	DWG NO	REV
CHECKED	B	N/A	1	
DRAWN	Brian Padgett	10/24/2024	SCALE NOT TO SCALE	WEIGHT N/A
			SHEET 1/1	