
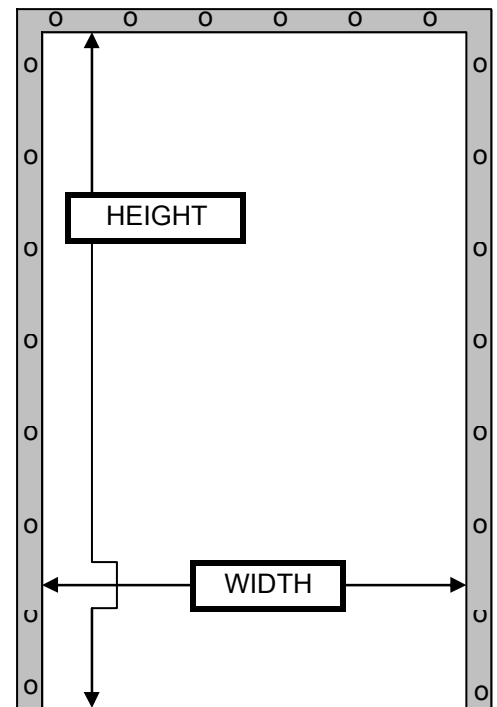


No Return Profile 3-Sided Frames (Double Rabbet)

FRAME PART	UL RATED	NON RATED
THROAT		
MINIMUM	4 1/2"	3/18"
MAXIMUM	14 3/8"	No limit
A=SOFFIT		
MINIMUM	1 1/4"	5/8"
MAXIMUM	11"	No limit
B=RABBETS		
MINIMUM	1 9/16"	5/8"
MAXIMUM	To suit Door	No limit
C=STOP		
MINIMUM	5/8"	5/8"
MAXIMUM	1"	Varies
D=FACES		
MINIMUM	1 1/4"	5/8"
MAXIMUM	4"	No limit
HEIGHT		
MINIMUM	20"	20"
MAXIMUM	96"	No limit
WIDTH - SGL.		
MINIMUM	24"	No limit
MAXIMUM	42"	No limit
WIDTH PAIR		
MINIMUM	N/A	No limit
MAXIMUM	N/A	No limit

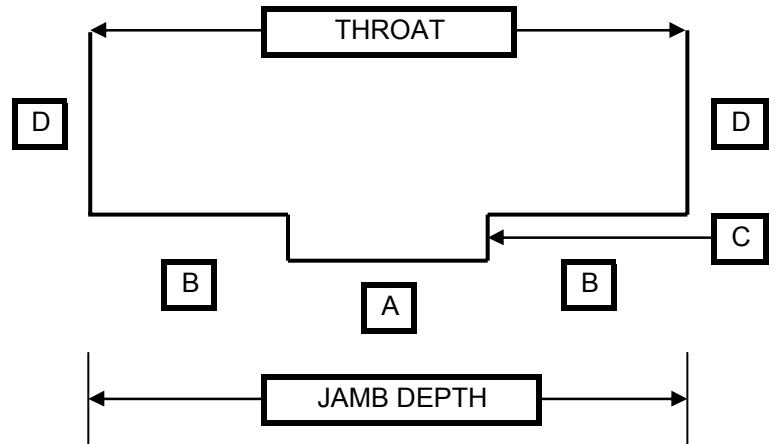

Holes in faces for screw / nail attachment

**** Maximum Fire Rating = 90 Minute ****

*** A = 1 1/4" min. for Compression Anchors**

Rough Opening (Comp. Anc.) = Door Opening + 2" Width, + 3/4" Height

Rough Opening (No Anc) = Door Opening + 1 1/2" Width, + 3/4" Height

ANCHOR OPTIONS

UL - None (Face holes only)

Non UL - None, CO, SS, WS